


CLIMATELINE  
Finished Plasterboard



Pre-finished wall and ceiling lining system

## WHEN TIME MATTERS



**climate**<sup>Y</sup>  
THE CLEAN FINISH™

[climatesurfaces.com/climateline](http://climatesurfaces.com/climateline)

# Applications | Office & Commercial

- Significantly reduces disruption to a working office by eliminating plastering and painting from site.
- Reduce the time for lining and finishing by up to 60%
- Integrate Climateline® into a demountable partition suite for the ultimate flexible working environment.
- Office / Education / Healthcare / Aged Care.



# Applications | Pre-fab/Modular

- Contemporary, clean appearance.
- Eliminates wet trades for a significantly faster build.
- Board joints won't crack during module transportation.
- Fast and simple to repair any damage.
- Available in cut to size panels for larger projects.



## Panel Range

**ClimateLine Standard** – standard plasterboard substrate for dry areas

**ClimateLine Aqua** – moisture resistant plasterboard substrate for wet areas

**Available in a wide range of sizes and cut to size pieces**

- 10 and 13mm thickness
- Standard range of sizes
- Maximum length 6000mm
- Maximum width 1350mm

Range of performance boards available on request

## Climate Decor Shield Surface Performance

ClimateLine features a Climate Decor Shield powder coat surface.

- 5 x more abrasion, scratch and wash resistant than an acrylic paint surface
- Vapour permeable, water resistant
- VOC free, low waste eco friendly coating technology
- Low maintenance and easy to clean

## Project Solutions

**A customised solution to suit your design, install and delivery needs.**

For projects that require 300m<sup>2</sup> or more, ClimateLine can be supplied in a wide range of customised colours combined with custom board length, width and thickness. An ideal solution to optimise the benefits of ClimateLine.

## Compliance

The plasterboard substrate used to manufacture ClimateLine is manufactured to AS/NZS 2588.

### Durability

ClimateLine will meet the durability requirements of NZBC B2.3.1(c) for 5 years when installed as per specifications.

ClimateLine will meet the durability requirements for interior linings of 10 years in accordance with the Building Code of Australia.

### Fire Performance

**New Zealand: NZBC C/UM2 Group 1S**


**Australia: BCA C 1.10 A Group 1**

Tested to New Zealand and Australian standards in accordance with the relevant building codes by an independent registered laboratory.


Test reports available on request.

## Panel jointer range

Jointers available in a wide range of lengths in matching powder coat or anodise finish.




H Jointer




End Cap



Internal Corner



SlimLine Jointer



External Corner



Negative Detail



## Colour

A standard range of colours are available. To view the range visit: [climatesurfaces.com/climateline](http://climatesurfaces.com/climateline)

*Sample Colour:  
Arctic Frost*

## Accessories

### Touch Up Paint

Specially formulated acrylic paint matching the powder coating for easy and seamless touch-ups.

See ClimateLine Repair Process document at [www.climatesurfaces.com](http://www.climatesurfaces.com)


### Screw Caps

Matching self adhesive screw caps for covering un-concealed fixings when installed as a ceiling lining.

# Installation Information

ClimateLine® is installed using standard pre-finished lining installation techniques.

Recommended installation instructions available at [www.climatesurfaces.com](http://www.climatesurfaces.com)

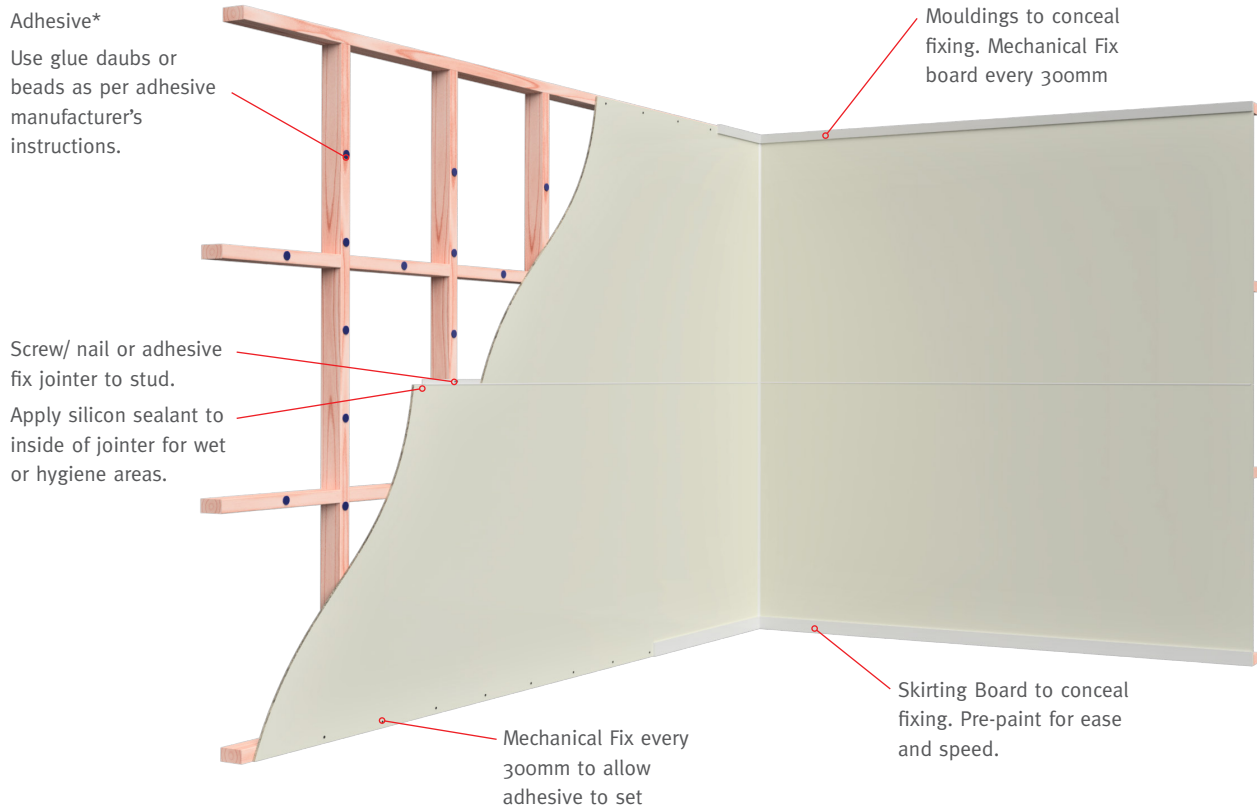

\* Use water based adhesive.

## Limitations of Use

- Do not use as a bracing element.
- Must not be used in external situations.
- Must not be exposed to water or be installed in situations where extended exposure to humidity above 90% RH can reasonably be expected. Such areas include group shower or steam rooms and moisture and chlorine rich environments such as indoor heated swimming pools.
- Must not be exposed to temperatures in excess of 52°C for prolonged periods.



ClimateLine® is backed by a 10 year Manufacturer's Limited Warranty.

Obtain a copy of the full Warranty at [www.climatesurfaces.com](http://www.climatesurfaces.com)

Manufactured by:

**climate**  
THE CLEAN FINISH

Available in Australia and New Zealand

**Climate Coating Ltd**

Customer Services Ph 0800 256 111

PO Box 107 018, Airport Oaks, Auckland, New Zealand

Phone (64 9) 256 7879 / Fax (64 9) 256 7872

[www.climatesurfaces.com](http://www.climatesurfaces.com)